



CLF-03

Thick bed tile adhesive that holds its form, even at

25mm



FLEXIBLE LARGE FORMAT & NATURAL STONE TILE ADHESIVE

A fast setting, pourable, thick bed tile adhesive for porcelain, ceramic and natural stone floor tiles. Perfect for uneven backgrounds such as tamped concrete, either inside or out. Available in grey and white.



3mm to 25mm
bed depth



Grout in just
3 hours



30 minute pot life
for grey, 60 minutes
for white



For internal and
external use




One 20kg bag
covers approx. 3.7m²
at a 3mm bed depth



For your peace
of mind

HOW TO INSTALL LARGE FLOOR TILES:



Watch Now

MIX



Add one 20kg bag to 4 litres (for grey adhesive) or 4.2 litres (for white adhesive) of clean water, and mix to a smooth pourable consistency with an electric drill mixer. Allow to stand for 2 minutes, then re-mix for 30 seconds.

Use the fresh grey adhesive within 30 minutes, and the white adhesive within 1 hour at room temperature. Bear in mind that high site temperatures will reduce the pot life and working time.

APPLY



Straight after mixing, pour the adhesive onto the floor and spread using a suitable large format trowel, so the ribs are all in one direction.

Press the tiles firmly into the adhesive, checking periodically that good contact is maintained with the backs of the tiles. Fix the tiles within 15-20 minutes, and once positioned, you'll have a 10 minute adjustment time. Leave at least 3mm for grout joints between tiles.

FINISH



Remove surplus adhesive from tiles and joints with a damp sponge/cloth and allow to fully set.

Finish with Dunlop GX-500 Flexible Grout, available in 8 colours with a matching FX-90 sealant if needed.

APPLICATION AREAS:

- ✓ Interior/exterior floors
- ✓ Kitchens, bathrooms, wet rooms
- ✓ Power showers
- ✓ Swimming pools
- ✓ Underfloor heated screeds
- ✓ Electric undertile heating cables
- ✗ Not for encapsulating underfloor heating pipes

TILE TYPES:

- ✓ Glazed and unglazed ceramic
- ✓ Porcelain
- ✓ Natural stone (non-translucent)
- ✓ Mosaics - ceramic, porcelain or natural stone
- ✓ Transparent or water sensitive natural stone (see product datasheet for details)

BACKGROUNDS:

- ✓ Concrete and cement/sand screeds
- ✓ Anhydrite screeds
- ✓ Asphalt (flooring grade)
- ✓ Fibre reinforced cement boards
- ✓ Existing vinyl tiles (not cushioned)
- ✓ Plywood overlay (min. 15mm thick)
- ✓ Encapsulated underfloor heating
- ✓ T&G floorboards (with uncoupling membrane)




Scan for
product info
datasheets,
and videos.

Dunlop Sales: 01782 591160
Dunlop Technical: 01782 591120
info@dunloptrade.com
www.dunloptrade.com

Dunlop and the Flying D device are trademarks of Sumitomo Rubber Group and are used under license by Building Adhesives Ltd.


EXTERNAL PORCELAIN

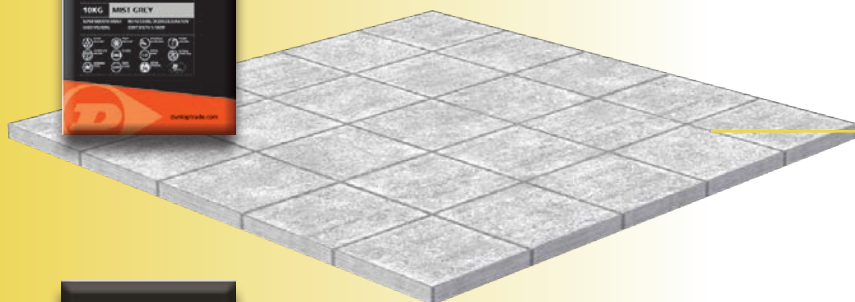

GX-500 FLEXIBLE GROUT

A water and frost resistant, flexible grout available in 8 colours.

- ✓ Smooth and hard wearing finish
- ✓ Up to 15mm joints
- ✓ Reduced efflorescence

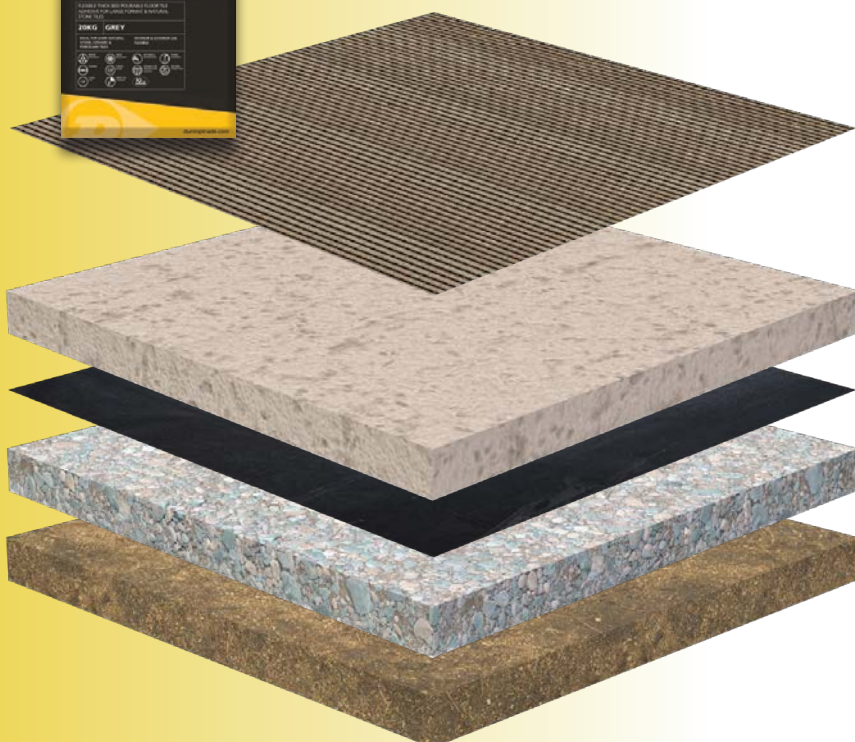

CLF-03 FLEXIBLE LARGE FORMAT AND NATURAL STONE ADHESIVE

Flexible adhesive for use with porcelain, ceramics and stone.

- ✓ Pourable
- ✓ Up to 25mm bed depth
- ✓ For large format

Concrete or Screed

Slip Membrane

Compacted Aggregate

Subsoil